



# SKID STEER LOADERS

2086



# SERIOUS MUSCLE FOR SERIOUS WORK

## SPECIFICATIONS



**ADVANCED** ▲ 70.7-hp Yanmar Interim Tier IV-certified turbocharged diesel engine keeps this machine powered up and ready to work.



**ADD STRENGTH** ▲ to your compact fleet with an operating capacity of up to 2,900 pounds (with optional counterweight).




**ENHANCED STABILITY** ▲ with a wider tread width, low center of gravity, and increased machine width.



**FAST TOOL CHANGES** ▲ are made possible with the optional hydraulic Multi-Tach™ attachment system allows the operator to change attachments without leaving the seat.

**STURDY** ▲ Level II-certified ROPS/FOPS structure provides protection, yet allows an unobstructed view to the attachment and surrounding work areas.

		2086
<b>DIMENSIONS</b>	<b>A.</b> Overall Operating Height - Fully Raised (mm)	168.3" (4275)
	<b>B.</b> Height to Hinge Pin - Fully Raised (mm)	124.3" (3157)
	<b>C.</b> Overall Height to Top of ROPS (mm)	82" (2083)
	<b>D.</b> Ground Clearance to Chassis (mm)	9.1" (231)
	<b>E.</b> Overall Length with Bucket (mm)	141.5" (3594)
	<b>F.</b> Overall Length without Bucket (mm)	105.8" (2687)
	<b>G.</b> Wheelbase (mm)	48.4" (1229)
	<b>H.</b> Dump Reach at Full Height (mm)	35.2" (894)
	<b>I.</b> Bucket Rollback at Ground	28°
	<b>J.</b> Dump Angle	37°
	<b>K.</b> Overall Width (mm)	72.5" (1841)
	<b>L.</b> Bucket Width (mm)	74" (1880)
	<b>M.</b> Clearance Circle - Rear (mm)	69" (1753)
	<b>N.</b> Clearance Circle - Front without Bucket (mm)	54" (1372)
	<b>O.</b> Clearance Circle - Front with Bucket (mm)	90.5" (2299)
	<b>P.</b> Seat to Ground Height (mm)	43.3' (1100)
	<b>Q.</b> Rollback at Full Height	97°
<b>R.</b> Dump Height (mm)	94.8" (2408)	
<b>S.</b> Departure Angle	29°	
Standard Specification Tire Size		14.00 x 16.5 HD
<b>ENGINE</b>	Make	Yanmar
	Model	4TNV98T - Interim Tier IV
	Power (kW) @ rpm	70.7 hp (52.7) @ 2500
	Displacement (L)	203 cu.in. (3.3)
	Maximum Torque (Nm) @ rpm	206 ft.-lbs. (279.3) @ 1700
<b>HYDRAULIC SYSTEM</b>	Auxiliary Hydraulics - Standard (L/min)	21.8 gpm (82.5)
	High-Flow Hydraulics - Optional (L/min)	36.9 gpm (139.7)
	System Relief Pressure (bar)	3000 psi (207)
	Reservoir Capacity (L)	16 gal. (60.6)
<b>CAPACITIES / WEIGHT</b>	Rated Operating Capacity <sup>A</sup> (kg)	2600 lbs. (1179)
	With Optional Counterweight <sup>A</sup> (kg)	2900 lbs. (1315)
	Tipping Load (kg)	5200 lbs. (2359)
	Fuel Tank (L)	24 gal. (91)
	Travel Speed - Maximum (km/hr)	13.9 mph (22.4)
	Operating Weight <sup>B</sup> - Approximate (kg)	8740 lbs. (3964)

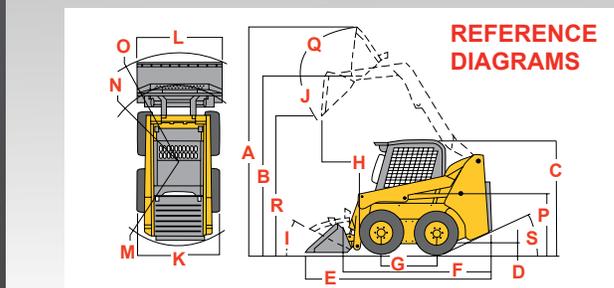

For more information on Mustang Skid Steer Loaders and the rest of the Mustang equipment line, call our hotline at

**1-800-628-0491**

or visit [mustangmfg.com](http://mustangmfg.com)

West Bend, WI USA  
Tel: 262-334-9461  
Fax: 262-338-7517

A Per SAE J818, SAE J732, and ISO 14397

B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank