

YANMAR



2015 COMPACT TRACTOR ATTACHMENTS

A PASSION FOR THE LAND

No one buys just a tractor. The real fun starts with all the attachments and implements you can add on. The tools that help you cut, till, scrape, mow, seed, rake and take care of a hundred other things on your to-do list. The tools that help make your land better, more beautiful and more prosperous.

At Yanmar, we've been at home in the dirt for more than 100 years. From the beginning, it's been our own passion for the land that's inspired us to design and build the highest quality, most durable, hardest-working products you can buy.

Today, we're proud to offer a full line of compact utility tractor attachments, each built to work harmoniously with our own tractors, as well as others. And each engineered to bring you — and your tractor — closer to the land you love. **YANMAR**

- 4 ROTARY CUTTERS**
Make short work of anything that's growing where you don't want it to.
- 6 FLEXWING ROTARY CUTTER**
This lightweight cutter — purpose-built for smaller tractors — saves time and money.
- 8 ROTARY TILLERS**
Serious tools for those serious about their planting, gardening and landscaping.
- 10 BOX SCRAPERS**
Durable, versatile scrapers let you tackle tough jobs, regardless of the season.
- 11 REAR BLADES**
From landscaping to driveway grading to snow removal, we've got the blade for you.
- 12 POST HOLE DIGGERS**
Rugged implements for the toughest landscaping, farming and municipal jobs.
- 13 SNOW BLOWERS**
Remove powdery, crusted, icy or heavy wet snow in no time at all.
- 14 FINISH MOWERS**
Triple-cut capacity makes short, beautiful work of the largest lawns
- 16 PRECISION SEEDERS**
Versatile seeders for a wide range of grass and food plot applications
- 18 PULVERIZERS**
Show no mercy on hard, compacted soil, large clumps and rough, encrusted terrain.
- 20 GRADING SCRAPERS**
Turn rough, heavy-use surfaces into works of art.
- 21 LANDSCAPE RAKES**
You'll run out of jobs long before you run out of uses for these rugged rakes.
- 22 CORE AERATORS**
Professional-grade pluggers to revitalize any lawn.
- 23 DISC HARROWS**
Versatile tillage tools for large homes, hobby farms and nurseries.
- 24 STUMP GRINDERS**
Quickly turn unsightly stumps into useful, natural mulch.
- 25 QUICK HITCH**
Spend less time changing attachments.

ROTARY CUTTERS

SINGLE-SPINDLE

Quickly cut down weeds, brush and your list of chores.

Whether you're clearing brush along acres of fence line, maintaining a roadway or just keeping weeds in check in an orchard or on a large property, these single-spindle rotary cutters for lower-horsepower tractors help you make short work of anything that's growing where you don't want it to. Each features a rugged sub-structure, a smooth, slope-top deck and quick-change blades built to easily handle the toughest conditions.



- Ideal for tractors 15 – 50 hp
- 3-point hitch: Limited Cat 1 and 1
- Up to 1-inch cut capacity
- 3-year limited gearbox warranty

STANDARD REAR METAL BAND DEFLECTORS

FULL-LENGTH SKID SHOES are a standard feature, allowing cutter to glide easily over rough terrain



SPECIFICATIONS

MODEL	STANDARD DUTY				MEDIUM DUTY		
	YRC48	YRC60	YRC72	YRC84	YRC600	YRC720	YRC840
Yanmar Tractor Models	Sx3100, Ex Series, 324, 424	Sx3100, Ex Series, 324, 424	Ex450, Lx Series	Ex450, Lx Series	Sx3100, Ex Series	Sx3100, Ex Series, Lx Series	Ex450, Lx Series
Tractor PTO HP (min)	15-50	25-50	30-65	35-90	30-120		40-120
Hitch Category/Type	Cat 1 / clevis			Cat 1 and 2 / clevis			
Cutting Width (in.)	48	60	72	84	60	72	84
Transport Width (in.)	53.5	65.5	72.5	89.5	67.5	79.5	91.5
Maximum Overall Length (in.)	92	104	116	128	104	116	128
Deck Length (in.)	58	70	84	96	70	84	96
Cutting Height Range (in.)	1-9				2-12		
Cutting Capacity (in.)	1.5	2		3			
Gearbox HP	65		75	90	120		
Gearbox Output Shaft Diameter (in.)	1.57			2			
Blade Tip Speed (FPM)	13,000	14,355	14,963	15,086	15,525	15,900	16,000 / 16,300
Deck Side Depth (in.)	9.4		9.8		12.6		
Approximate Weight* (lbs.)	498	604	828	1084	1,068	1,200	1,416
Blade Dimensions (in.)	(2) .38 x 3		(2) .5 x 3		(2) .5 x 4		
Blade Carrier	Oval stump jumper			Round stump jumper			
Blade Mount System	Quick Change pins						
Blade Pin Diameter (in.)	1.5						
Cutting Deck Thickness	11-Gauge				10-Gauge		
Safety-Shielded Driveline	Cat 3			Cat 4			
Driveline Protection	Slip-clutch or shear-pin			Slip-clutch			
Tractor PTO Speed (RPM)	540						
Quick Hitch Compatible	Yes						
Cutting Area Shielding	Chain Shielding optional						

*Weight without chain shielding

FLEXWING ROTARY CUTTER

LOW-HP MODEL

It's lightweight, but not to be taken lightly.

Please resist the urge to underestimate our lightweight FlexWing cutter. Its innovative design is purpose-built for smaller, more fuel-efficient tractors, so you'll save money every time you have to mow. But since you'll never sacrifice the performance you need to cut weeds and light brush up to 1.5 inches in diameter, you'll efficiently make short work of grassy fields, pastures, waterways, parks and ball fields.

SPECIFICATIONS

STANDARD DUTY

MODEL	YRC144
Yanmar Tractor Models	Ex450, Lx Series
Tractor PTO HP Range	35 min
Main Driveline	Cat 4
Wing Driveline	Cat 3
Tractor Hitch	Swivel Clevis
Cutting Swath (in.)	144
Cutting Height (in.)	2-12
Cutting Capacity Diameter (in.)	1-1.5
Side Frame Depth (in.)	10
Tractor PTO (RPM)	540
Deck Thickness	12 guage
Hinges/Hinge Rod Diameter (in.)	1
Weight (lbs)	2,450
Vertical Shaft Size (in.)	2
Splitter/Spindle Gearbox HP	160 / 90
Blade Thickness (in.)	.5
Blade Width (in.)	4
Blade Type	Blade bolt, Hi-tilt
Blade Overlap (in.)	6
Hydraulics Wing Flex	90° up, 22° down
Suspension	Spring on center
Wheel Type	Laminated, used aircraft, foam-filled aircraft
Shielding	Standard chain shielding
Gearbox Warranty (Limited)	6 Years



- Tongue weight under 900 lbs.
- Full-length, 24-inch replaceable side skids feature a durable, large wear surface and formed angle to prevent scalping
- Simple safety lock secures deck for safe, easy transporting
- Deep, 10-inch side frame and sloped deck for greater material capacity and more productive cutting
- Multiple wheel options: laminated solid tires, used aircraft tires or foam-filled aircraft tires
- Dual-wheels available on wings and center for extra flotation

FlexWing Cutter passes all applicable safety standards for thrown objects without chain shielding. However, if this unit will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.



ROTARY TILLERS

STANDARD DUTY | FORWARD AND REVERSE

Get your hands in the dirt, without getting your hands in the dirt.

Our line of finely crafted, durable rotary tillers is designed for folks who are serious about their tools. From hobby farming to yard and turf applications, whether you do it for fun or for a living, these tillers will handle whatever planting, gardening and landscaping challenges you tackle. Available in either forward or reverse rotation, the solid rotor shafts make for smoother operation and deeper soil penetration. Each is easy to maintain and built to last, so you'll always get the most out of your tractor.

- Each model available as either forward or reverse rotation
- Reverse rotation tillers will often till deeper and faster than forward rotation models on the initial pass
- Slip clutch driveline protection is standard on all models



SPECIFICATIONS

MODEL	STANDARD DUTY			MEDIUM DUTY		
	YRT44S/SR	YRT52S/SR	YRT60S/SR	YRT60C/CR	YRT68C/CR	YRT74C/CR
Yanmar Tractor Models	221, 324, 424, Sx3100	Sx3100, 324, 424	Sx3100, Ex Series, 324,424	Ex450, Lx410/4100	Ex450, Lx Series	Ex450, Lx Series
Tractor PTO HP Range	18 – 30			20 – 45		
Tractor Hitch	Limited Cat 1 & 1			Cat 1		
Tilling Width (in.)	44	52	60	60	68	74
Weight (lbs.)	396/404	426/435	467/473	597/604	634/641	665/672
Maximum Tilling Depth (in.)	7			7.5		
Drive Type	#80 chain			#80 chain		
Standard Number of Tines/Flanges	20/5	24/6	28/7	42/7	48/8	54/9
Number of Tines per Flange	4 C-type (6 optional)			6 C-type (4 optional)		
Rotor Shaft (RPM)	240			240		
PTO Driveline Protection	Slip clutch			Slip clutch		
Tractor PTO Speed (RPM)	540			540		
Gearbox Housing	Cast aluminum			Heavy-duty cast iron		
Gearbox Drain Plug	Yes			Yes		
Convertible Side Shift (right) (in.)	7.5	11.5	15.5	15.5	19.5	22.5
Quick Hitch Compatible	Yes			Yes		

MODELS FOR SUBCOMPACT TRACTORS

- Fits tractors 18–30 hp
- 3-point hitch: Limited Cat 1 and 1
- Ideal for estate-sized properties
- Rugged steel tines can till seven inches into tough, hard-packed ground

MODELS FOR COMPACT TRACTORS

- Fits tractors 20–45 hp
- 3-point hitch: Cat 1
- Sturdy rear tailgate evenly distributes dirt, leaving a smooth, flat seedbed
- Strong, cast-iron gearbox withstands rugged use

BOX SCRAPERS

STANDARD DUTY

You never know what you might have to scrape. With these, it won't matter.

Whether it's landscape grading, removing thatch build-up, construction cleanup or snow removal, it's not a problem with our box scrapers. Easily carve into sod and dirt with full-length, high-carbon, double-beveled, reversible cutting edges. With reinforced steel A-frames and hardened scarifier teeth with replaceable tips, these box scrapers are durable and versatile enough to take on any job, any season.

SPECIFICATIONS

MODELS	STANDARD DUTY				
	YBS48	YBS54	YBS60	YBS65	YBS72
Yanmar Tractor Models	221, 324, 424, Sx3100	Sx3100, Ex Series 324, 424	Sx3100, Ex Series Lx410/4100, 324, 424	Ex450, Lx Series	Ex450, Lx Series
Tractor Engine HP Range	up to 25 hp	up to 45 hp			
Tractor Hitch	Cat 0, Ltd 1 & 1	Cat 1			
Working Width (in)	48	54	60	65	72
Capacity (ft. ³)	6.8	10.3	11.5	12.5	13.8
Approximate Weight (lbs)	285	486	514	528	551
Scarifier Depth (in)	0 – 1.5	0, 1.5 or 3 adjustable			
Number of Scarifiers	4	4	5	5	6
Tailgate Type	Fixed				
Cutting Edges	2				

- Reversible, replaceable high-carbon cutting edges
- High-strength moldboards for rugged conditions
- Faster, easier and safer hook-ups with ASABE Quick Hitch compatibility



REAR BLADES

STANDARD AND MEDIUM DUTY

Scrape, grade and level almost any playing field.

A good rear blade is like a trusty pocketknife. You never run out of uses for it. Whether you're landscaping the yard, grading driveways or roadways, cleaning up a construction site, plowing snow or even cleaning livestock pens, you can always count on the strength and durability of these blades. Quickly and easily adjust the tilt, angle and offset to make short work of any job.



SPECIFICATIONS

MODEL	STANDARD DUTY		
	YRB54S	YRB60S	YRB72S
Yanmar Tractor Models	221, 324, 424, Sx3100	Ex Series, Lx Series 221, 324, 424	Ex450, Lx Series
Tractor Engine HP Range	up to 30 hp	up to 30 hp	
Tractor Hitch	Limited Cat 1 and 1		
Working Width (in.)	54	60	72
Approximate Weight (lbs)	134	142	156
Moldboard Height (in.)	12		
Moldboard Thickness (in.)	3/16 (grade 80 steel)		
Reversible Cutting Edge	3/8" x 6"		
Pivot Angle	Forward - 5 @ 15°, Reverse - 5 @ 15°		
Skid Shoes	Optional		
ASABE Quick Hitch Compatible	Yes		
Parking Stand	Optional		

MODEL	STANDARD DUTY (PREMIUM)		
	YRB60C	YRB72C	YRB84C
Yanmar Tractor Models	Ex Series, Lx410/4100/ Lx450/4500, 221, 324, 424, Sx3100	Ex450, Lx Series	
Tractor Engine HP Range	20-45 hp		
Tractor Hitch	Cat 1		
Working Width (in.)	60	72	84
Approximate Weight (lbs)	268	288	308
Moldboard Height (in.)	15		
Moldboard Thickness (in.)	1/4 (grade 80 steel)		
Reversible Cutting Edge	1/2" x 6"		
Pivot Angle	Forward - 5 @ 15°, Reverse - 5 @ 15°		
Tilt	up to 15°		
Offset	up to 12" left or right		
End Plates	Optional		
Skid Shoes	Optional		
ASABE Quick Hitch Compatible	Yes		
Parking Stand	Optional		

- Formed, curved moldboards for exceptional rigidity and strength (Standard Duty models)
- 360-degree pivoting blade with forward/reverse positions
- Reversible/replaceable high-carbon cutting edge
- ASABE Quick Hitch compatibility for faster, easier and safer hook-ups
- Convenient parking stand standard
- Five forward and five backfill angles, plus six offset positions (Medium Duty models)



MEDIUM DUTY

MODEL	MEDIUM DUTY		
	YRB720	YRB840	YRB960
Yanmar Tractor Models	Ex Series, Lx410/4100	Ex450, Lx Series	Lx450/4500
Tractor Engine HP Range	30-75		
Tractor Hitch	Cat 1 & 2		
Moldboard Length (in.)	71	83	95
Moldboard Height (in.)	18		
Moldboard Thickness (in.)	.313		
Approximate Weight (lbs.)	530	565	600
Angle Forward	360°, 5 forward		
Angle Reverse	360°, 5 reverse		
Tilt	5-position		
Offset	4, 10 or 16 left or right		
End Plates	Optional		
Skid Shoes	Optional		

POST HOLE DIGGERS

STANDARD AND MEDIUM DUTY

Holes. It's all they do.

Make short work of acres of fence line, a fancy new deck or a yard full of new plants and shrubs. With their heavy-duty, welded construction, rugged gearbox with tapered roller bearing, spring-loaded seals and forged-steel teeth, these posthole diggers won't back down from any soil condition. Add a range of auger bit diameters and you've got just the right tool for landscaping, farming or municipal jobs.

SPECIFICATIONS

MODEL	STANDARD DUTY		MEDIUM DUTY
	YPH25	YPH35	YPH65
Yanmar Tractor Models	221, 324, 424, Sx3100, Ex2900, Ex3200	Sx3100, Ex2900, Ex3200, Lx410/4100	Ex450, Lx Series
Tractor PTO HP Range	14-25	20-35	25-65
Tractor Hitch	Cat 0, Limited 1 & 1	Cat 1	Cat 1 & 2
Drive Type	Gearbox		
Tractor PTO Speed (RPM)	540		
Approximate Weight (lbs.)	140	146	194

AUGER BIT OPTIONS (DIAMETER X LENGTH)

MODEL	YPH25	YPH35	YPH65
	Standard-Duty (in.)	6x36, 9x36, 12x36	6x48, 9x48, 12x48
Heavy-Duty (in.)		6x48, 9x48, 12x48, 18x48	6x48, 9x48, 12x48, 18x48, 24x48
Heavy-Duty Pilot Augers (in.)			18x48 (pilot 9) 34x48 (pilot 12)



- More throwing force with less horsepower than single-stage snow blowers
- Highly efficient 4-blade fan moves snow faster
- Reinforced steel side plates offer exceptional durability
- Augers with optimized feed paddles and excellent feeding capability
- Superior discharge chute design resists plugging
- Optional hydraulic or electric chute rotator for quick, easy adjustments



SNOW BLOWERS

STANDARD DUTY

Big snow? Big deal.

Whether it's powdery, crusted, icy or heavy wet snow, you'll be able to move large amounts of it in small amounts of time with these rugged, dependable snow blowers. Purpose-built especially for subcompact and compact tractors, each features a two-stage design that provides more throwing force with less horsepower, so you can quickly and easily give Old Man Winter the cold shoulder.

SPECIFICATIONS

MODEL	STANDARD DUTY		MEDIUM DUTY
	YSB54	YSB64	YSB74
Yanmar Tractor Models	221, 324, 424, Sx3100, Ex2900, Ex3200	221, 324, 424, Sx3100, Ex series, Lx410/4100	Ex Series, Lx Series
Tractor PTO HP	15-25	15-35	30-50
Tractor PTO Speed (RPM)	540		
Hitch (All models are ASABE Quick Hitch Compatible)	Cat 1		Cat 1 & 2
Working Width (in.)	54	64	74
Transport Width (in.)	56	66	76
Working Height (in.)	24		26
Approximate Weight (lbs.)	415	436	592
Driveline	Cat 3		
Driveline Protection	Shear bolt		
Drive Type – Fan	Gearbox		
Drive Type – Auger	Gearbox & chain		
Number of Feeder Augers	1		
Auger Flighting (in.)	.31x2		
Chute Rotation	270°		
Hydraulic Chute Rotator	Optional		
Fan Diameter (in.)	22	24	
Fan Depth (in.)	6	8	
Replaceable Skids	Yes		
Adjustable Skids	Yes		

FINISH MOWERS

STANDARD DUTY | REAR-MOUNT | REAR-DISCHARGE

Turn acres of grass into well-groomed acres of grass.

There's nothing more rewarding than a lawn that's as finely groomed as a country club fairway. Especially when it doesn't take all day to make it look that way. That's why our finish mowers are engineered for speed, precision and enduring quality. The innovative rounded-front, tapered-side, rear-discharge deck allows you to reduce trim and mow with better maneuverability. And the heat-treated, alloy steel blades always give you a beautiful, high-precision cut on any type of grass.

- Deep 4.6-inch deck, baffling and unique rear discharge design ensures exceptional material distribution
- Rounded front corners and tapered deck sides improve maneuverability and grass discharge
- Box-style construction for superior deck strength
- Spring-loaded idler arms automatically maintain the correct tension on our custom-made belts
- Tubular caster arms and heavy, tall deck rail supports (4.5-inches) for increased strength and durability



YFM54 shown with optional chain shielding*

*All YFM Series finish mower models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

SPECIFICATIONS

MODEL	STANDARD DUTY			MEDIUM DUTY		
	YFM54	YFM60	YFM72	YFM600	YFM720	YFM840
Yanmar Tractor Models	221, 324, 424, Sx3100, Ex2900, Ex3200	Sx3100, Ex2900, Ex3200, 324, 424	Ex450, Lx Series	Ex450, Lx Series		
Tractor PTO HP Range	15-25	15-35	20-35	15-40	20-40	25-49
Hitch/Quick Hitch Compatible	Limited Cat 1/No		Cat 1/Yes			
Cutting Width (in.)	54	60	72	69	72	84
Weight (lbs)	401	503	603	653	719	830
Cutting Height Range (in.)	1-4.5			1-5.5		1-4.25
Overall Width (in.)	55	61	73	62	74	86
Deck Material Thickness	10-gauge		8-gauge			
Side Skirt (in.)	10-gauge x 4.6 deep	8-gauge x 4.6 deep		8 gauge x 5.375 w/ .5625 diam. skid rod bumper		
Gearbox HP Rating	25	35		60		
Blade Tip Speed (FPM)	16,200	18,030	18,000	18,100	18,000	17,900
Blade Spindles/Bearings	3 cast iron housings/greasable ball bearings			3 cast iron housings/greasable tapered roller bearing		
Tractor PTO Speed (RPM)	540					
Driveline Size	Cat 3					
Belt	B-Section Kevlar®			B-Section Kevlar® with clutching cover		
Belt Adjustment	Spring-loaded idler					
Rear Chain Shielding	Optional					
Mower Warranty	1 year residential or 90 day commercial			1 year		
Gearbox Warranty (Limited)	3 year homeowners or 1 year commercial			6 years		

TURF FLEXWING FINISH MOWER

Spend more time admiring your grass and less time cutting it.

Put a fairway finish on your lawn in no time with this powerfully efficient, 12.5-foot cutting width mower. Three decks mounted to a heavy-duty trailer provide triple-cut capacity, so you can mow up to seven acres per hour at five mph. Make short, beautiful work of even the largest lawns, and enjoy your handiwork long before the sun goes down.



- Superior cutting capability and contoured wing decks let you quickly and precisely cut large, uneven areas
- Rounded front, tapered rear deck design lets you mow close to objects without damage
- Round skid rod glides deck bottom over roots and uneven ground, adding strength to the deck skirt
- Folds easily for storage with a 93-inch transport width that fits comfortably into a standard 8-foot garage door
- Safety latching system automatically engages when the decks are raised into the transport position

SPECIFICATIONS

MODEL	YFM150
Yanmar Tractor Models	Ex450, Lx Series
Tractor PTO HP Range	25-60
Input Driveline	Cat 3 (Constant Velocity)
Wing Drivelines	Cat 3
Cutting Width (ft.)	12.5
Cutting Height Range (in.)	1-4.5
Wing Deck Cutting Width (in.)	54
Deck Overlap (in.)	6.15
Overall Width (in.)	151
Transport Width (in.)	93
Maximum Overall Length (in.)	135
Transport Length (in.)	126
Splitter Gearbox HP	100
Blade Tip Speed (FPM)	16,200
Drive Type	Gearbox over v-belt
Transport Tires (in.)	2 (20 x 8)
Caster Wheel Bearing	Power metal bushing
Caster Wheels (in.)	4 x 10 solid (10)
Deck Thickness	10-gauge steel plate
Wing Deck Lift Cylinders (in.)	3x10 single-acting
Center Deck Lift Cylinders (in.)	3x8 single-acting
Trailer Frame Construction (in.)	.25 wall tubing
Hitch Adjustment	Floating clevis, multi-position
Blade Spindles Bearings	Greasable ball bearings
Blade Dimensions (in.)	9 (.25x2.5)
Blade Spindles	9 cast iron
Cutting Height Adjustment	Spacer on caster
Belts	B-section, Kevlar®
Belt Adjustment	Spring-loaded idler
Chain Shielding	Optional



PRECISION SEEDERS

STANDARD AND MEDIUM DUTY

From native grasses to food plots, you'll always plant with confidence.

We don't call them Precision Seeders for nothing. With three seed boxes — for cool season, warm season and legume — you can plant anything from rye and oats to prairie grasses, wild flowers and soybeans.

With the most versatile seed box combinations you'll find anywhere, these seeders give you the flexibility to easily handle primary seeding, over-seeding and a wide range of grass and food plot applications.



- Plant up to three different types of seeds in one pass.
- Ideal for hunters and small acreage farmers seeding legumes and larger seeds.
- Easily and accurately adjust seeding rates with a single lever.
- Plant cool season seeds, in rows, at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass.

SPECIFICATIONS

MODEL	STANDARD DUTY		MEDIUM DUTY
	YPS48	YPS60	YPS72
Yanmar Tractor Models	Sx3100, Ex2900, Ex3200	Sx3100 Ex Series, Lx Series	Ex450, Lx Series
Tractor Engine HP Range	25-40	30-45	30-75
Tractor Hitch	Cat 1 & 2		
Working Width (in.)	49	60	72
Drive Type	Ground		
Number of Seed Boxes Available	3		
Seed Metering	fluted and picker wheel		
Seed Cups	7	8	10
Seed Box Ratio	4-speed (2 standard, 2 optional)		
Cool Season Seed Box Capacity (bushel)	4	5	6
Native Warm Season Grass Seed Box Capacity (bushel)	5	6.25	7.5
Legume Seed Box Capacity (bushel)	1	1.25	1.5
Front Roller Spikes (in.)	128 (.5x2 carbide steel)	160 (.5x2 carbide steel)	192 (.5x2 carbide steel)
Disc Blades (in.)	6 (18)	8 (18)	10 (18)
Cast Iron Cultipacker Weight (lbs.)	211	263	316
ASABE Quick Hitch Compatible	Yes		

- Seed box combos enable efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth
- Seed boxes can be engaged/disengaged independently with a single lynch pin, no tools required
- Accessories like front-spiked rollers, disc blades and cast iron cultipackers allow for custom configuration to your specific application requirements



FOOD PLOT SEEDERS

STANDARD AND MEDIUM DUTY

SPECIFICATIONS

MODEL	STANDARD DUTY		MEDIUM DUTY
	YFS48	YFS60	YFS72
Yanmar Tractor Models	Sx3100, Ex2900, Ex3200	Sx3100, Ex Series, Lx Series	Ex450, Lx Series
Tractor Engine HP	25-40	30-45	30-75
Tractor Hitch	Cat 1 & 2		
Working Width (in.)	48	60	72
Drive Type	Ground		
ASABE Quick Hitch Compatible	Yes		
Seed Boxes Available	3		
Seed Cups (7" spacing)	7	8	10
Row Units	Standard		
Disc Blades (in.)	16" notched (8)		18" notched (10)
Cool Season Seed Box	Standard		
Cool Season Seed Box Capacity (bu)	4.00	5.00	6.00
Legume Seed Box	1 Standard/1 Optional		
Legume Seed Box Capacity (bu)	1.00	1.25	1.50
Cast Iron or Nylon Trailing Cultipacker	Optional (9.5" diameter cast iron or 11" diameter nylon)		
Calibration Tray	Standard		
Crank Handle	Standard		
Mud Scrapers	Optional		



PULVERIZERS

STANDARD AND MEDIUM DUTY

Pulverizer. That about sums it up.

Whether you're preparing a seedbed, laying new sod or simply leveling a lumpy surface, these professional-grade pulverizers get the job done quickly and efficiently. Durable, high-carbon steel pins break up compacted soil, crush large clumps and have little mercy on tough, encrusted ground, turning you into a landscaping warrior.

STANDARD DUTY SERIES MODELS

- Tough, H-beam frame construction
- Heat-treated steel pins welded into the roller for superior performance
- Create even smoother finishes by adding a second roller to any model

HEAVY DUTY SERIES MODELS

- 10-inch wide, flange H-beam frame provides weight of 49 lbs. per foot
- Durable, high-carbon steel pins ensure cloddy or hard-packed soil is completely pulverized
- Two, 150-lb. compression springs force roller pins into soil for deep penetration and constant contact
- 12-inch wide, flange H-beam frame provides weight of 53 lbs. per foot
- Self-aligning 1-inch bearings
- Also available in Big Tooth models



SPECIFICATIONS

MODEL	STANDARD DUTY		MEDIUM DUTY			
	YPV48	YPV60	YPV720	YPV720B (BIG TOOTH)	YPV840	YPV840B (BIG TOOTH)
Yanmar Tractor Models	221, 324, 424, Sx3100	Sx3100, Ex2900, Ex3200, Lx410/4100 324, 424	Sx3100, Ex Series, Lx Series	Sx3100, Ex Series, Lx Series	Ex450, Lx Series	Ex450, Lx Series
Tractor Engine HP Range	15-45		30-65			
Tractor Hitch	Limited Cat 1 & 1		Cat 1			
Working Width (in.)	48	60	72		84	
Overall Width (in.)	54	66	78		90	
Overall Height (in.)	36					
Approximate Weight (lbs.)	480	550	715	735	784	805
Depth Front to Back (in.)	28.3		30.5			
Front Scarifying Teeth (in.)	9 (.625 x 8) Alloy steel	11 (.625 x 8) Alloy steel	14 (.625 x 8) Alloy steel	14 (.5 x 2 x 13) Hardened	16 (.625 x 8) Alloy steel	16 (.5 x 2 x 13) Hardened
Rear Scarifying Teeth (in.)	8 (.625 x 8) Alloy steel	10 (.625 x 8) Alloy steel	13 (.625 x 8) Alloy steel	13 (.5 x 2 x 13) Hardened	15 (.5 x 8) Alloy steel	15 (.5 x 2 x 13) Hardened
Bearings	1 inch self-aligning					
Big Tooth	-	-	-	Standard	-	Standard
Roller Pins (in.)	.38 x 1.12 hardened pins					
H-Beam Dimensions (in.)	10 x 10, 49 lbs./ft.		10 x 12, 53 lbs./ft.			
Springs	(2) 150-lb. compression					
ASABE Quick Hitch Compatible	Yes					

SECOND ROLLER (in.)	48	60	72	84
Approximate Weight (lbs.)	105	125	145	165
Roller Diameter (in.)	6.63 OD			
Roller Pins (in.)	.38 x 1.12			
Springs	2 (75-lb compression)			

GRADING SCRAPERS

STANDARD DUTY

Makes heavy-use surfaces look like new.

Turn driveways, show arenas and baseball diamonds into works of art with these heavy-duty scrapers. Crafted to handle more materials in fewer passes, they give you smoother surfaces without the washboard effect. So whether you drive on it, ride on it or play on it, it will always look like a professional manicured it.



SPECIFICATIONS

STANDARD DUTY

MODEL	YGS54	YGS60	YGS72
Yanmar Tractor Models	221, 324, 424, Sx3100	Sx3100, Ex Series, Lx410/4100, 324, 424	EX450 / Lx Series
Tractor Engine HP Range	15-30	20-45	
Hitch Category	Limited Cat 1	Cat 1	
Working Width (in.)	53	59	71
Overall Width (in.)	58	64	76
Overall Length (in.)	42	46	
Box Height (in.)	14	16	
Weight (lbs.)	409	553	655
Number of Shanks	4		5
Reversible Cutting Edge (in.)	.5 x 6		
Replaceable Scarifiers/Shanks	-4.0, -2.5, -1.0, +1.0	-2.5, -1.0, +0.5, +2.5	
Skid Shoe Adjustment	-0.75 to + 0.75	-1.0 to +0.5	
Lower Hitch Design	Clevis		

- Heavy-duty mast plate creates more down force for smoother surfaces
- Adjustable skid shoes (for road shaping) and shanks make changes easy
- Tall side frames hold more material for leveling
- Approachable leading edges and structural reinforcements keep scraper stronger for longer
- Reversible/replaceable high-carbon cutting edges
- 16-inch box height is one of the tallest in the industry
- ASABE Quick Hitch compatibility for faster, easier and safer hook-ups

LANDSCAPE RAKES

STANDARD DUTY

With so many uses, it seems insulting to just call it a rake.

Spread topsoil and gravel. Remove stones and debris. Prepare soil for planting or seeding. Grade livestock areas and gravel driveways. Clean up construction sites. Even renovate a pasture. These ruggedly durable landscape rakes can handle everything from the toughest cleanup jobs to the precision raking you demand for light-duty lawn care and general maintenance. Which means you'll run out of jobs long before you run out of uses for your rake.



SPECIFICATIONS

STANDARD DUTY

STANDARD DUTY (PREMIUM)

MODEL	YLR52S	YLR60S	YLR72S	YLR72C	YLR84C	YLR96C
Yanmar Tractor Models	221, 324, 424, Sc Series	Sc Series, 221, 324, 424	Sx3100, Ex2900/3200	Sx3100, Ex2900/3200	Ex 450, Lx Series	
Guage Wheels	Optional					
ASABE Quick Hitch Compatible	Yes					
Parking Stand	Optional					

- High-strength, box-type beams and spring-steel tines handle rocks, dirt and sand
- Adjustable angles and 360-degree pivot control flow of material to left, right or center
- 1-inch tine spacing provides superior material collection or a smooth, even grade

CORE AERATORS

MEDIUM DUTY

Stress relief for your lawn.

Tightly compacted soil is the mortal enemy of a lush, even lawn. These professional-grade pluggers help reduce soil compaction, allowing air, water and minerals to revitalize the toughest turf. Whether it's a soccer field, municipal grounds or your own large lawn, there's no better – or easier – way to help revitalize it and keep it green all year long.



SPECIFICATIONS

MEDIUM DUTY

MODEL	YPL48	YPL60	YPL72
Yanmar Tractor Models	221, 324, 424, Sx3100	Sx3100, Ex Series Lx410/4100, 324, 424	Sx3100, Ex Series, Lx Series
Tractor Engine HP Range	20-65		
Working Width (in.)	48	60	72
Overall Width (in.)	56	67.5	78.5
Approximate Weight (lbs.)	437	539	561
Minimum Tractor Lift (lbs.)	500	600	700
Weight Tray (in.)	2 (22 x 14.5)	2 (22 x 20)	2 (22 x 25.5)
Spoons, Case Hardened (in.)	64 (.75)	96 (.75)	96 (.75)
Spoon Penetration (in.)	Up to 4.5		
ASABE Quick Hitch Compatible	Yes		

MEDIUM DUTY SERIES


- Reinforced carrier frame holds up to 1,000 pounds to maximize penetration
- Case-hardened, 1/8-inch-thick spoons dig deep into even the toughest turf
- Greased journal bearings turn independently for smooth operation
- Standard parking stands for easy connect/disconnect
- Optional water weight kit holds up to 52 gallons, which adds up to 500 pounds of penetration force

DISC HARROWS

MEDIUM DUTY

Groundbreaking versatility.

When it comes to the implements you add to your arsenal, versatility is always a key feature. These disk harrows are designed with large homes, hobby farms and nurseries in mind. From primary tillage, gardening and food plots to firebreaks and weed control, there's no faster way to make you and your tractor more productive. These rugged 6- and 7-disc harrows open and break up the soil for planting, seeding or just aesthetic landscaping.

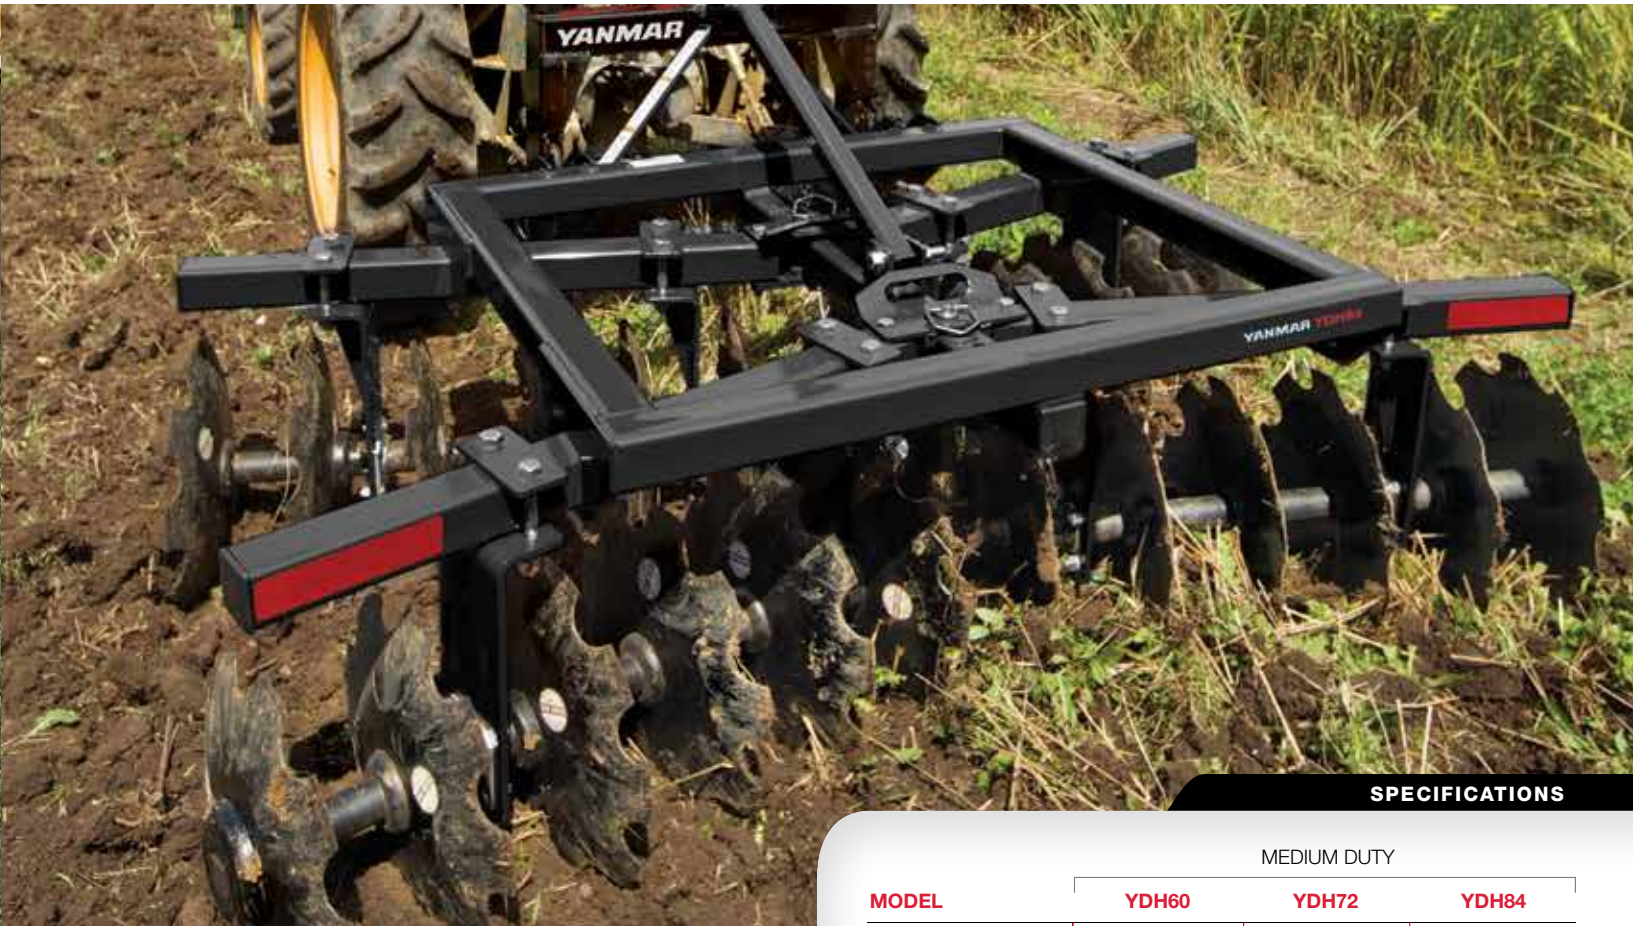

SPECIFICATIONS

MEDIUM DUTY

MODEL	YDH60	YDH72	YDH84
Yanmar Tractor Models	SX3100, Ex Series, Lx Series	Ex450, Lx Series	Ex450, Lx Series
Tractor Engine HP Range	28-70	32-70	36-70
Tractor Hitch	Cat 1		
Width (in.)	60	72	84
Approximate Weight (lbs.)	735	818	900
Disc Diameter (in.)	18		
Disc Quantity	16	20	24
Disc Spacing (in.)	7.5		

- 18-inch discs can be all notched or notched and smooth to maximize productivity
- Adjust disc angles 0, 7, 14 and 21 degrees
- Heavy-duty, 3-inch by 3-inch structural, tubular construction
- Triple-sealed, self-aligning ball bearings

STUMP GRINDER

STANDARD DUTY

You see stumps. We see mulch.

The trees are gone, but the unsightly stumps remain. Not for long. With this PTO-powered stump grinder, it takes just minutes to turn an ugly, useless stump into natural mulch that conserves moisture around trees and flower beds, reduces weeds and enhances the visual appeal of your property. And because the high-speed, toothed disk grinds deep below ground level to turn both stumps and roots into chips, it's like the stump was never even there.

SPECIFICATIONS

STANDARD DUTY

MODEL	YSG50
Yanmar Tractor Models	Sx3100, Ex Series, Lx Series, 324, 424
Tractor PTO HP Range	15-50
Tractor Hitch	Cat 1 & 2
Cutting Wheel Diameter (in.)	20
Cutting Wheel Speed (RPM)	1,037
Cutter Tip Speed (FPM)	5,428
Hub Torque (lbs./ft.)	76-250
Approximate Weight (lbs.)	545

- Grind stumps 16 inches above and below ground level
- 24 tough, carbide steel teeth cut bi-directionally for quicker grinding
- Hinged debris shield for easier grinding below ground level
- Mounts to 3-point hitch for safe operation from the tractor seat
- Slip clutches protect against abnormally severe shock loads
- Slim design and long reach allow access to tight spaces

3-POINT QUICK HITCH

Spend less time changing attachments.

Make quick work of changing from one 3-point hitch attachment to another, many times without even leaving the seat of your tractor. Compatible with most Yanmar attachments, including rear blades, box scrapers, landscape rakes, finish mowers, cutters, disc harrows, pulverizers, core aerators, seeders and tillers.



- For use on tractors with Category 1, 3-point hitch
- Heavy-duty steel construction
- Adjustable top link ball bracket
- 7/8-inch mounting pins and adapter bushings
- Lower arms lock automatically
- Fast, easy attachment and release
- Designed to ASABE Quick Hitch standards
- Comes standard with a bracket for use with attachments that have a floating top link

SPECIFICATIONS


3-POINT QUICK HITCH

Yanmar Tractor Models	All models
Width (in.)	27.25
Approximate Weight (lbs.)	75
Tractor Hitch	Cat 1
Mounting Pin Diameter (in.)	.875
Adapter Bushing Diameter (in.)	1.125



Made in the USA.

Yanmar attachments are proudly made in the USA and are sold through a network of dedicated local dealerships that are committed to serving the communities in which they live and work. Our dealers understand the enduring commitment to quality that has been part of the Yanmar name for more than 100 years, and they are equally committed to providing the expertise and service to help you fulfill your own passion for the land for generations to come. **To find a dealer nearest you, please visit YanmarTractor.com.**

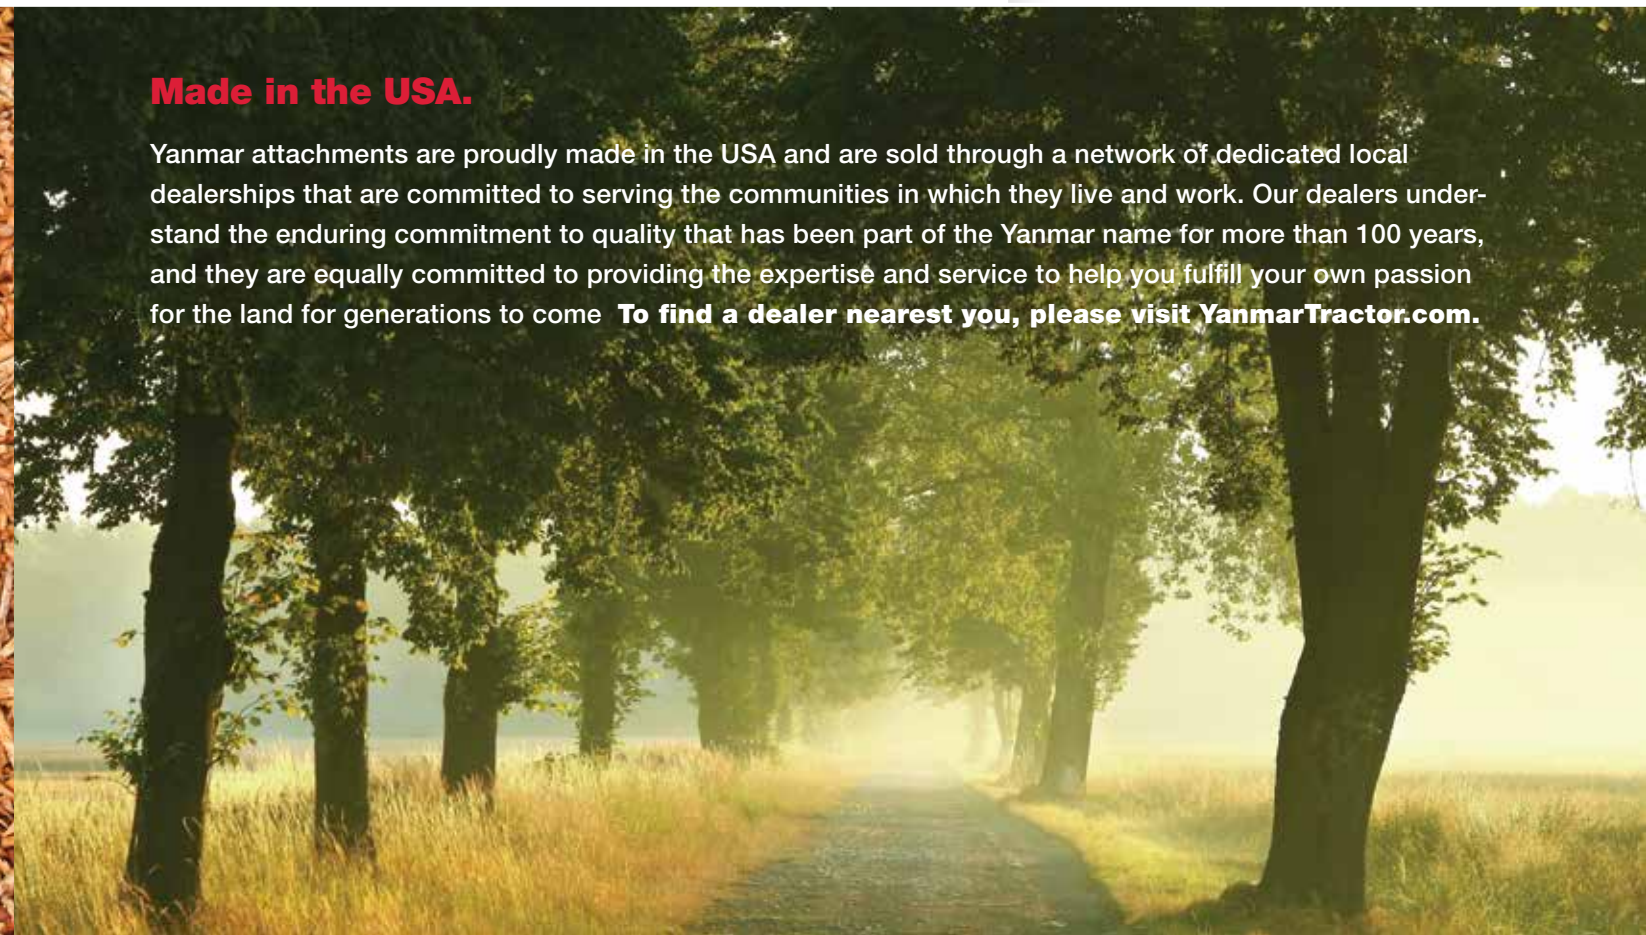

NOTES

NOTES





YANMAR

© 2015 Yanmar. Yanmar has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without notice. Yanmar is not responsible for differences between the specifications or illustrations contained in this publication and the actual equipment. Equipment produced by other manufacturers may be shown in photographs in this brochure for the purpose of illustration only and is not intended as an endorsement of that particular equipment or its suitability. Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. All rights reserved. Yanmar America, 101 International Parkway, Adairsville GA 30103

WWW.YANMARTRACTOR.COM